



ezviz[™]
a *HIKVISION* company



CESCO
Technology

Safeguard your Home

CESCO, 92 Lagan Road, Dublin Industrial Estate, Glasnevin, Dublin 11, D11 A291


Contact: jarlath@cescotechnology.ie or brian@cesco.ie

Telephone: 01 8309689

Fax: 01 8309973

www.cescotechnology.ie

EZVIZ are all about creating ways to connect you visually to your life. No matter where you are, EZVIZ cloud services and smart home video technology can help you feel like you are at home - right from the palm of your hand.

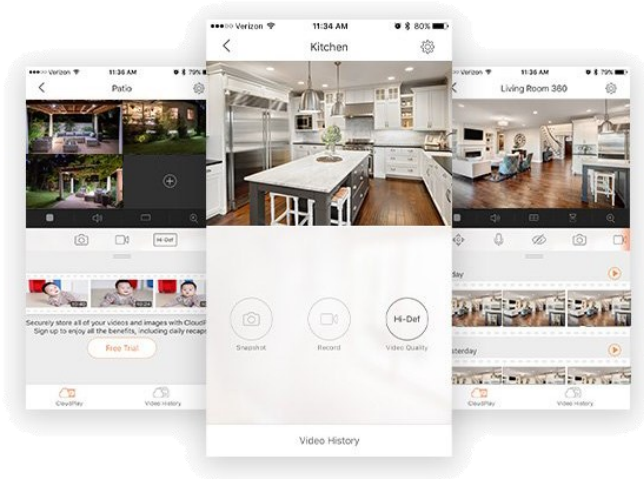

Even with a host of powerful new features, the EZVIZ app is still simple to use. It's clean layout makes it easy to find all of your cameras, change settings and see what's happening with just a few taps.









EZVIZ is the consumer and residential focused subsidiary of Hikvision - the world's largest manufacturer of video surveillance solutions. EZVIZ builds upon Hikvision's expertise and knowledge to bring robust, commercial-quality video products to consumers and the smart home market



C2C

Wireless Infrared Detector










-  HD 720P
-  HD 1080P
-  Supports 2.4GHz Wi-Fi
-  2 Way Audio
-  Micro SD Card - Up to 128GB
-  True Day/Night auto switch - IR support up to 5 meters
-  PIR Detection & push notifications to mobile APP
-  Secure cloud recording (optional)

Camera	C2C-720P	C2C-1080P
Image Sensor	1/4" 1MP HD Progressive Scan CMOS	1/3" 2MP HD Progressive Scan CMOS
Shutter Speed	Self-adaptive	Self-adaptive
Lens	2.8mm@ F2.5, View angle: 90° X 111°	2.8mm@ F2.5, View angle: 106° X 125°
Lens Mount	M12	M12
Day & Night	IR cut filter with auto switch	IR cut filter with auto switch
DNR	3D DNR	3D DNR
WDR	Digital WDR	Digital WDR
Image		
Max. Resolution	1280 X 720	1920 X 1080
Frame Rate	Self adaptive - Max: 25fps	Self adaptive - Max: 15fps
Network		
Storage	Micro SD Card up to 128GB	Micro SD Card up to 128GB
Smart Alarm	Smart motion detection	Smart motion detection
General Function	Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image, Password Protection	Anti-Flicker, Dual-Stream, Heart Beat, Mirror Image, Password Protection
General		
Operating Conditions	-10° ~ +50°, Humidity up to 95%	-10° ~ +50°, Humidity up to 95%
Power Supply	DC 5V ±10%	DC 5V ±10%
Power Consumption	Max 3 W	Max 3 W
IR Range	Max 5 Meters	Max 5 Meters

C2Mini

1080P Mini Camera



-  HD 1080P
-  Supports 2.4GHz Wi-Fi
-  2 Way Audio
-  Micro SD Card - Up to 128GB
-  True Day/Night auto switch - IR support up to 5 meters
-  PIR Detection & push notifications to mobile APP
-  Secure cloud recording (optional)

Camera	C2Mini
Image Sensor	1/2.7" Progressive Scan CMOS
Minimum Illumination	0.02 Lux (F2.2, AGC ON), 0 Lux with IR
Shutter Speed	1/30s to 1/100,000s
Lens	2.8mm@ F2.0, View angle: 116° X 135°
Lens Mount	M12
Day & Night	IR cut filter
DNR	3D DNR
WDR	HDR, Max 120db

Image	
Max. Resolution	1920 X 1080
Frame Rate	Self adaptive - Max: 30fps

Network	
Storage	Micro SD Card up to 128GB
Smart Alarm	Smart motion detection
General Function	Dual-Stream, Mirror Image, 2 Way Audio











General	
Operating Conditions	-10° ~ +45°, Humidity up to 95%
Power Supply	DC 5V ±10%
Power Consumption	Max 3 W
IR Range	Max 7.5 Meters



C6B

1.3 Megapixel PT Camera



-  HD 960P
-  Supports 2.4GHz Wi-Fi
-  2 Way Audio
-  Micro SD Card - Up to 128GB
-  True Day/Night auto switch - IR support up to 5 meters
-  PIR Detection & push notifications to mobile APP
-  Secure cloud recording (optional)
-  Smart Tracking - Track moving objects
-  Smart sound localisation
-  Lens Masking for Privacy Protection


Camera	C6B
Image Sensor	1/3" Progressive Scan CMOS
Shutter Speed	Self -adaptive
Lens	4mm@ F2.2, Diagonal angle: 95°
PT Angle	Pan: 340°, Tilt: 130°
Lens Mount	M12
Day & Night	IR cut fil  Secure cloud recording (optional)
DNR	3D DNR
WDR	Digital WDR

Image	
Max. Resolution	1280 X 960
Frame Rate	Network Transmission: Adaptive Adjustment

Network	
Storage	Micro SD Card up to 128GB
Smart Alarm	Motion detection
General Function	Flicker Filter, Dual-Stream, Heart Beat, Mirror










General	
Operating Conditions	-20° ~ +60°, Humidity up to 95%
Power Supply	DC 5V ±10%
Power Consumption	Max 8 W
IR Range	Max 10 Meters



C6T

2MP Multifunctional PT Camera



-  HD 1080P
-  2 Way Audio
-  True Day/Night auto switch - IR support up to 5 meters
-  PIR Detection & push notifications to mobile APP
-  Secure cloud recording (optional)
-  Micro SD Card - Up to 128GB
-  Support PT Function
-  Smart motion tracking shoot
-  Lens Masking for Privacy Protection

Camera	C6T
Image Sensor	2 Megapixel 1/3" Progressive Scan CMOS
Shutter Speed	Self-adaptive
Lens	4mm@ F2.2, Diagonal angle: 95°
PT Angle	Pan: 340°, Tilt: 90°
Lens Mount	M12
Day & Night	IR cut filter
DNR	3D DNR
WDR	Digital WDR

Image	
Max. Resolution	1920 X 1080
Frame Rate	Network Transmission: Adaptive Adjustment

Network	
Storage	Micro SD Card up to 128GB
Smart Alarm	Smart motion detection
General Function	Flicker Filter, Dual-Stream, Heart Beat, Mirror

General	
Operating Conditions	-10° ~ +55°, Humidity up to 95%
Power Supply	DC 5V ±10%
Power Consumption	Max 8 W
IR Range	Max 10 Meters



C2Cube

720P Camera with PIR



HD 720P



Supports 2.4GHz Wi-Fi



2 Way Audio



Micro SD Card - Up to 128GB



True Day/Night auto switch -
IR support up to 10 meters



PIR Detection & push
notifications to mobile APP



Secure cloud recording (optional)



Camera	C2Mini
Image Sensor	1/3" Progressive Scan CMOS
Minimum Illumination	0.02 Lux (F2.0, AGC ON), 0 Lux with IR
Shutter Speed	Self-adaptive shutter
Lens	2.8mm@ F2.0, View angle: 92° X 115°
Lens Mount	M12
Day & Night	IR cut filter
DNR	3D DNR
WDR	HDR, Max 120db

Image	
Max. Resolution	1280 X 720 (Platform), 1280 X 960 (Device)
Frame Rate	Network Transmission: Adaptive Adjustment

Network	
Storage	Micro SD Card up to 128GB
Smart Alarm	PIR human detection, motion detection
General Function	Flicker Filter, Dual-Stream, Heart Beat, Mirror

General	
Operating Conditions	-30° ~ +60°, Humidity up to 95%
Power Supply	DC 12V ±10%
Power Consumption	Max 5 W
IR Range	Max 10 Meters

C3S

1080P Outdoor Bullet Camera



HD 1080P



Supports 2.4GHz Wi-Fi



Micro SD Card - Up to 128GB



True Day/Night auto switch - IR support up to 30 meters



PIR Detection & push notifications to mobile APP



IP66 Rated



Secure cloud recording (optional)



Support POE



Camera	C3S (POE)	C3S (WIFI)
Image Sensor	1/2.7" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS
Minimum Illumination	0.02 Lux (F2.0, AGC ON), 0 Lux with IR	0.02 Lux (F2.0, AGC ON), 0 Lux with IR
Shutter Speed	Self-adaptive shutter	Self-adaptive shutter
Lens	4mm@ F2.0, View angle: 90° X 107.5°	4mm@ F2.0, View angle: 90° X 107.5°
Lens Mount	M12	M12
Day & Night	IR cut filter	IR cut filter
DNR	3D DNR	3D DNR
WDR	WDR, Max 120db	WDR, Max 120db

Image		
Max. Resolution	1920 X 1080P	1920 X 1080P
Frame Rate	Network Transmission: Adaptive Adjustment	Network Transmission: Adaptive Adjustment

Network		
Storage	Micro SD Card up to 128GB	Micro SD Card up to 128GB
Smart Alarm	Motion Detection	Motion Detection
General Function	Flicker Filter, Dual-Stream, Heart Beat, Mirror Image, Watermark, Password Protection	Flicker Filter, Dual-Stream, Heart Beat, Mirror Image, Watermark, Password Protection

General		
Operating Conditions	-25° ~ +60°, Humidity up to 95%	-25° ~ +60°, Humidity up to 95%
Power Supply	POE (RJ45 Ethernet Port)	DC 5V ±10%
Power Consumption	Max 5 W (ICR 7W)	Max 12 W (ICR 7W)
IR Range	Max 30 Meters	Max 30 Meters

C4S

1080P Outdoor Dome Camera



HD 1080P



Supports 2.4GHz Wi-Fi



Micro SD Card - Up to 128GB



True Day/Night auto switch - IR support up to 30 meters



PIR Detection & push notifications to mobile APP



IP66 Rated



Secure cloud recording (optional)



Support POE

Camera	C3S (POE)	C3S (WIFI)
Image Sensor	1/2.7" Progressive Scan CMOS	1/2.7" Progressive Scan CMOS
Minimum Illumination	0.02 Lux (F2.0, AGC ON), 0 Lux with IR	0.02 Lux (F2.0, AGC ON), 0 Lux with IR
Shutter Speed	Self-adaptive shutter	Self-adaptive shutter
Lens	4mm@ F2.0, View angle: 90° X 107.5°	4mm@ F2.0, View angle: 90° X 107.5°
Lens Mount	M12	M12
Day & Night	IR cut filter	IR cut filter
DNR	3D DNR	3D DNR
WDR	WDR, Max 120db	WDR, Max 120db

Image	C3S (POE)	C3S (WIFI)
Max. Resolution	1920 X 1080P	1920 X 1080P
Frame Rate	Network Transmission: Adaptive Adjustment Max 25fps	Network Transmission: Adaptive Adjustment Max 25fps

Network	C3S (POE)	C3S (WIFI)
Storage	Micro SD Card up to 128GB	Micro SD Card up to 128GB
Smart Alarm	Motion Detection	Motion Detection
General Function	Flicker Filter, Dual-Stream, Heart Beat, Mirror Image, Watermark, Password Protection	Flicker Filter, Dual-Stream, Heart Beat, Mirror Image, Watermark, Password Protection

General	C3S (POE)	C3S (WIFI)
Operating Conditions	-30° ~ +60°, Humidity up to 95%	-25° ~ +60°, Humidity up to 95%
Power Supply	POE (RJ45 Ethernet Port)	DC 12V ±10%
Power Consumption	Max 5 W (ICR 7W)	Max 5 W (ICR 7W)
IR Range	Max 30 Meters	Max 30 Meters

ASK

Ezviz Alarm Starter KIT



The alarm starter kit is the perfect first step in building your EZVIZ secure home empire! The KIT consists of a wireless small animal immune PIR motion detector, a wireless door/window motion sensor, a remote control and of course the alarm hub. Additional units can be purchased separately to meet your individual needs. All you need to get started is a power source, a Wi-Fi connection and the EZVIZ app. No drilling or wiring is required, the setup is simple and you can easily integrate your EZVIZ cameras with the alarm giving you an all-round solution. Ideal for DIY installation.

A1 - Internet Alarm Hub

- Up to 32 wireless devices
- Connects with EZVIZ cloud
- Suitable for use with EZVIZ cameras
- Requires power supply (adaptor included)



T1 - Wireless Pet Immune PIR Detector

- Secures 12m X 12m area
- Does not react to domestic animals less than 25KG
- Battery life up to 2 years



T6 - Wireless Open/Close Detector

- Reacts to movement in 3 directions
- Trigger angle of only 3°
- Built in rechargeable battery



K2 - Remote Control

- Used to change mode of A1 Alarm Hub
- Emergency call button
- Battery life of 1 year




Ezviz Alarm Accessories



T1 - Wireless Pet Immune PIR Detector

- Secures 12m X 12m area
- Does not react to domestic animals less than 25KG
- Battery life up to 2 years

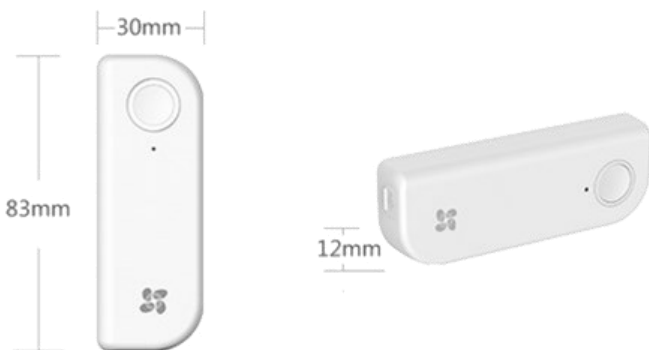

T6 - Wireless Open/Close Detector

- Reacts to movement in 3 directions
- Trigger angle of only 3°
- Built in rechargeable battery

T9 - Wireless Siren

- 85dB within 3 Meters
- Red lights blink when alarm occurs
- Built in rechargeable battery



T10 - Wireless Water Leak Detector

- Highly Sensitive water leak detector
- High Performance RF communication
- Cooperating with A1 base station
- Batter life up to 2 years



K2 - Remote Control

- Used to change mode of A1 Alarm Hub
- Emergency call button
- Battery life of 1 year



For more information please log onto:

www.cescotechnology.ie



Download the EZVIZ app today



CESCO, 92 Lagan Road, Dublin Industrial Estate, Glasnevin, Dublin 11

Contact: jarlath@cescotechnology.ie or brian@cesco.ie

Telephone: 01 8309689

Fax: 01 8309973

www.cescotechnology.ie